

Series 41 - Navigation Lights for direct mounting

Application

Application depending on visibilities.
See table in technical information.

Housing

Polycarbonate black or white, shock resistant, non-corrosive, non-magnetic, seawater resistant.

Optics

(Fresnel) plastic, shock resistant, seawater resistant, easy to change; range of visibility 2 nm (Masthead 3 nm)


Protection

IP 55 - Navigation Lights,
IP 67 - Foredeck Lights

Electric


(1) 3 wire (2) 2 wire

1

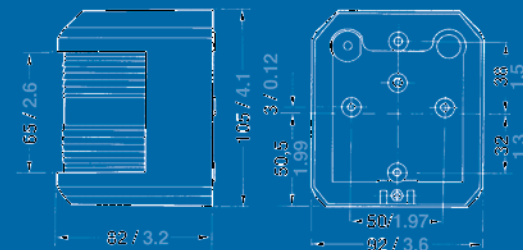





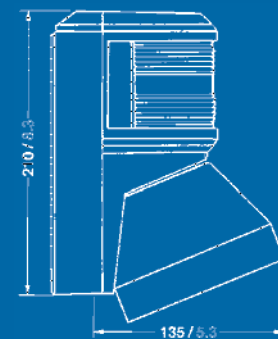


mm/inch

2




mm/inch

Bulb included										
Description	Vessels	Wattage	Visibility	Housing color	12 V 25 W	24 V 25 W	Housing color	12 V 25 W	24 V 25 W	
1  starboard	< 50 m	25 W	2 nm	black	41200	41220	white	41201	41221	
 port	< 50 m	25 W	2 nm	black	41300	41320	white	41301	41321	
 bicolor	< 20 m	25 W	2 nm	black	41100	41120	white	41101	41121	
 masthead	< 20 m	25 W	3 nm	black	41400	41420	white	41401	41421	
 stern	< 50 m	10 W	2 nm	black	41500	41520	white	41501	41521	
 stern yellow	< 50 m	25 W	2 nm	black	41502	3541403	white			
2  masthead/ foredeck comb.	< 20 m	25 W 50 W	3 nm	black	41404	41424	white	41405	41425	



Spare Parts / *Extras

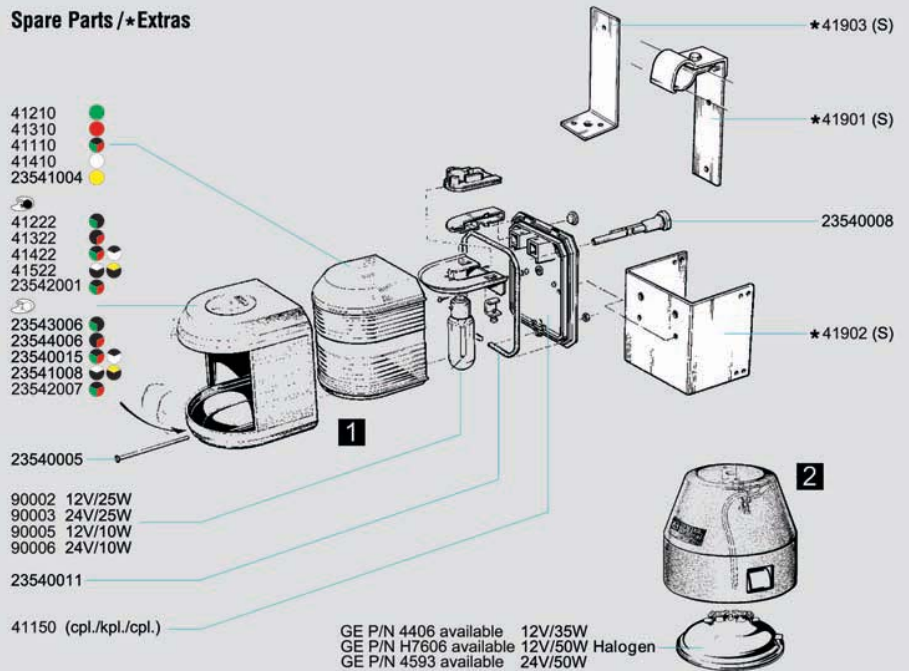

*Extras