


USCG	IMO	CE
	12 V	BA 9s 12V,5W

Series 20 - Navigation Lights designed for Power Boats

Application

Application depending on visibilities. See table in technical information. Signal white also for sailing boats.

Housing

Polycarbonate black or white, shock resistant, non-corrosive, nonmagnetic, seawater resistant.

Optics

(Fresnel) Polycarbonate, shock resistant; range of visibility 2 nm (Starboard, Port, Bicolor 1 nm)



Protection

IP 45

Electric

2 wire, 160 mm /6.3" lead, 0.82 mm² /AWG 18

1




mm/inch

2



mm/inch


2

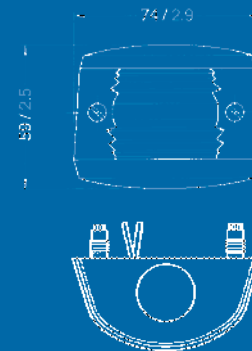

mm/inch

Bulb included							1	2
Description		Vessels	Wattage	Visibility	Housing color			
	starboard	< 12 m	5 W	1 nm	black	20200	20202	
					white	20201	20203	
	port	< 12 m	5 W	1 nm	black	20300	20302	
					white	20301	20303	
	bicolor	< 12 m	5 W	1 nm	black	20100		
					white	20101		
	masthead	< 12 m	5 W	2 nm	black	20400		
					white	20401		
	stern	< 50 m	5 W	2 nm	black	20500	20502	
					white		20503	
	masthead all-round	< 12 m	5 W	2 nm	black	20410		

Spare Parts

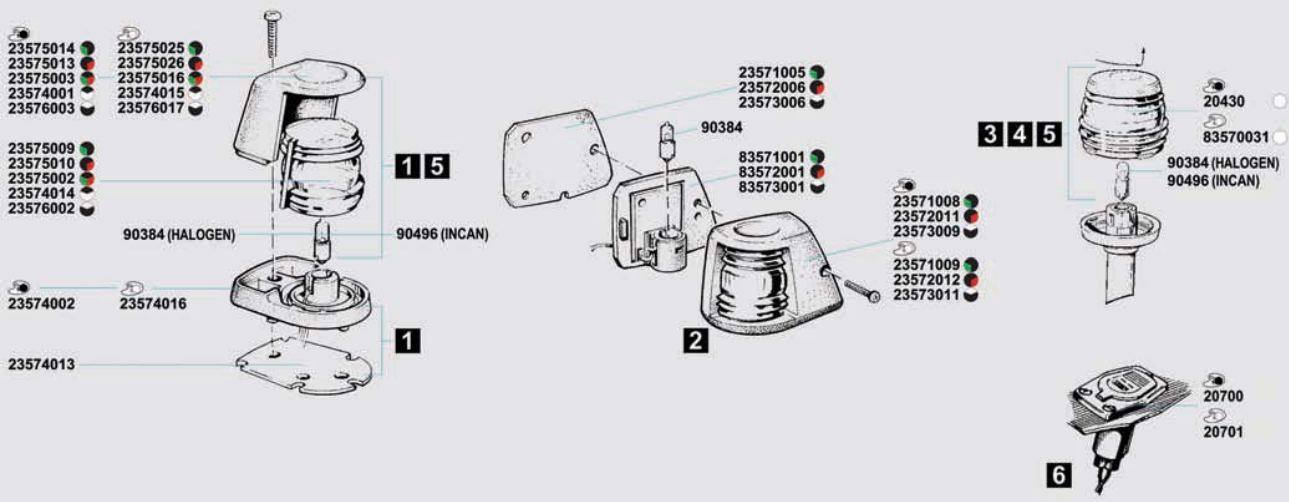

Plug in base for lights with insertable mast

USCG	IMO	CE
	12 V	BA 9s  12 V, 5 W

Series 20 - Navigation Lights designed for Power Boats

Application

Application depending on visibilities. See table in technical information. Signal white also for sailing boats.

Housing

Polycarbonate black or white, shock resistant, non-corrosive, nonmagnetic, seawater resistant.

Optics

(Fresnel) Polycarbonate, shock resistant; range of visibility 2 nm (Starboard, Port, Bicolor 1 nm)

Protection


IP 45


Electric

2 wire, 160 mm /6.3" lead, 0.82 mm² /AWG 18





mm/inch

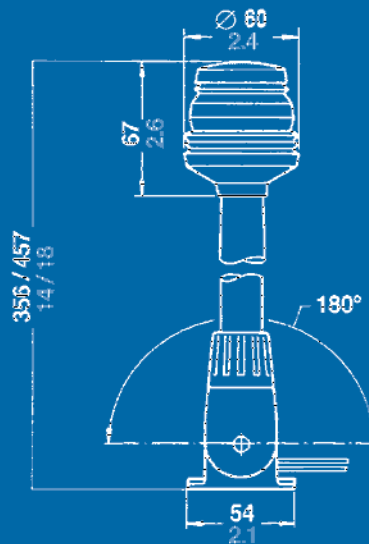
Bulb included		Vessels	Visibility	Housing color	Pedestal L 102 mm 4.0"	Pedestal L 203 mm 8.0"
Description						
1		< 50 m	2 nm	black	20040	20080
			2 nm	white	20041	20081




mm/inch

Bulb included		Vessels	Visibility	Housing color			
Description					L 356 mm 14.0"	L 356 mm 18.0"	L 914 mm 36.0"
2		< 50 m	2 nm	black	20140	20180	3570046
			2 nm	white	20141	20181	3570346

3

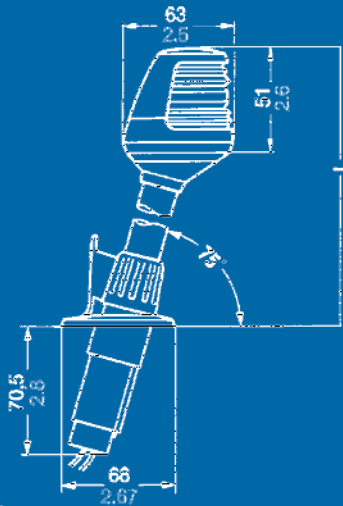


mm/inch

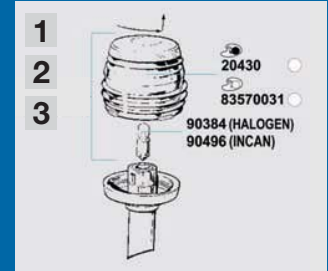

Bulb included											
Description	Vessels	Visibility	Housing color	L 190 mm 7.5"	L 305 mm 12.0"	L 610 mm 24.0"	L 1066 mm 42.0"	L 1220 mm 48.0"	L 1370 mm 54.0"	L 1520 mm 60.0"	
	< 12 m	2 nm	black	20106	20112						
		2 nm	white	20107							
	< 50 m	2 nm	black	20507							
		2 nm	white								
	< 50 m	2 nm	black				20420	20480	20540	20600	
		2 nm	white				20421	20481	20541	20601	
	< 50 m	2 nm	black			20240					

4

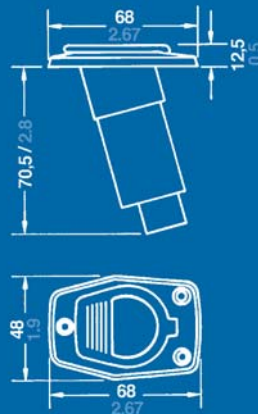

mm/inch

	Description	Housing color	
4	plug-in base	black	20700
		white	20701